

10/18/00
1c952 U.S. PTO

10-19-00

A
jc907 U.S. PTO
09/691337
10/18/00

Patent Application Transmittal

(only for new nonprovisional applications under 37 C.F.R. 1.53(b))

Correspondence Address:
FROMMER LAWRENCE & HAUG LLP
745 FIFTH AVENUE
NEW YORK, NEW YORK 10151
TEL: (212) 588-0800
FAX: (212) 588-0500

Date: October 18, 2000
Attorney Docket No.: 450117-02753

ASSISTANT COMMISSIONER FOR PATENTS
Box Patent Application
Washington, D.C. 20231

Sir:

With reference to the filing in the United States Patent and Trademark Office
of an application for patent in the name(s) of:

Jens WILDHAGEN

entitled:

METHOD AND DEVICE TO RETRIEVE RDS INFORMATION

The following are enclosed:

- ☒ Specification (12 pages)
☒ 8 Sheet(s) of Drawings
☒ 13 Claim(s) (including 1 independent claim(s))
☐ This application contains a multiple dependent claim

- ☒ Our check for \$ 750.00, calculated on the basis of the claims as
amended by any enclosed preliminary amendment as follows:

Basic Fee, \$710.00 (\$355.00)	\$ 710.00
Number of Claims in excess of 20 at \$18.00 (\$9.00) each:	-0-
Number of Independent Claims in excess of 3 at \$80.00 (\$40.00) each:	-0-
Multiple Dependent Claim Fee at \$270.00 (\$135.00)	-0-
Total Filing Fee	\$ 710.00

- ☒ Assignment Recording Fee \$40.00 \$ 40.00

- ☒ Oath or Declaration and Power of Attorney

☒ New ☒ signed ☐ unsigned
☐ Copy from a prior application (37 C.F.R. 1.63(d))

- ☒ Certified copy of each of the following application(s) to substantiate
the claim(s) for priority made in the Declaration:

<u>Application No.</u>	<u>Filed</u>	<u>In</u>
99 120 799.4	20 October 1999	Europe

Please charge any additional fees required for the filing of this
application or credit any overpayment to Deposit Account No. 50-0320.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP
Attorneys for Applicant

By: William S. Frommer
William S. Frommer
Reg. No. 25,506

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Jens WILDHAGEN
Filed : Herewith
For : METHOD AND DEVICE TO RETRIEVE RDS INFORMATION

745 Fifth Avenue
New York, New York 10151
Tel. (212) 588-0800

EXPRESS MAIL

Mailing Label Number EL588273243US
Date of Deposit October 18, 2000
I hereby certify that this paper or fee is being
deposited with the United States Postal Service
"Express Mail Post Office to Addressee" Service
under 37 CFR 1.10 on the date indicated above and
is addressed to the Assistant Commissioner for
Patents, Washington, D.C. 20231.

Charles Jackson
(Typed or printed name of person
mailing paper or fee)

Charles Jackson
(Signature of person mailing paper or fee)

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Before the issuance of the first Official Action,
please amend the above-identified application as follows:

IN THE CLAIMS:

Please amend the claims as follows:

Claim 3, line 1, delete "or 2";

Claim 4, line 1, delete "or 2";

Claim 5, line 1, delete "anyone of claims 1 to 4" and
insert --claim 1--;

Claim 9, line 1, delete "or 8";

Claim 10, line 1, delete "anyone of claims 1 to 9" and
insert --claim 1--;

Claim 11, line 1, delete "anyone of claims 1 to 10" and
insert --claim 1--;

Claim 12, line 1, delete "anyone of claims 1 to 11" and
insert --claim 1--;


Claim 13, line 2, delete "anyone of claims 1 to 12" and
insert --claim 1--.

REMARKS

The claims have been amended to eliminate multiple
dependencies. The filing fee has been calculated based upon
these amendments to the claims.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP
Attorneys for Applicant

By: 
William S. Frommer
Reg. No. 25,506
Tel. (212) 588-0800

PATENT
450117-02753

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR LETTERS PATENT

TITLE: METHOD AND DEVICE TO RETRIEVE RDS
INFORMATION

INVENTOR: Jens WILDHAGEN

William S. Frommer
Registration No. 25,506
FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151
Tel. (212) 588-0800

008101 450117-02753

Description

1 The present invention relates to the demodulation of radio data system (RDS) signals, in particular to a method to retrieve RDS information according to the pre-characterizing portion of claim 1 and to a RDS demodulator operating according to such a method.

5

In fm-broadcasting a stereo-multiplex signal is frequency modulated. The stereo-multiplex signal consists of a stereo-sum signal and a stereo-difference signal. The stereo-difference signal is amplitude modulated with suppressed carrier. To allow a coherent amplitude demodulation of the stereo-difference

10 signal at the receiver, a pilot carrier with half the AM-carrier frequency is added to the stereo-multiplex signal.

The stereo-sum signal and the stereo-difference signal are defined by

15

$$m_s(t) = a_l(t) + a_r(t)$$

$$m_d(t) = a_l(t) - a_r(t)$$

wherein $a_l(t)$ is the signal of the left audio channel and $a_r(t)$ is the signal of the right audio channel.

20

The stereo-multiplex signal is defined by

$$m_{stmux}(t) = m_s(t) + \sin(2\omega_{pil}t) \cdot m_d(t) + A_{pil} \cdot \sin(\omega_{pil}t)$$

25 wherein ω_{pil} is the carrier frequency and A_{pil} is the amplitude of the carrier.

The RDS-signal is added to the stereo-multiplex signal by modulating the in-phase or in quadrature component of the 3rd harmonic of the pilot carrier. Therefore, the multiplex signal is defined by:

30

$$m(t) = m_{stmux}(t) + \cos(3\omega_{pil}t) \cdot m_{rds}(t)$$

wherein $m_{rds}(t)$ is the RDS-signal.

Fig. 8 shows the basic functionality of a stereo-demultiplexer according to the

1 prior art. Since the 2nd harmonic of the pilot carrier is required for the coherent amplitude demodulation of the stereo-difference signal, the stereo-demultiplexer needs to recover this 2nd harmonic of the pilot carrier to perform the stereo-demultiplexing. Therefore, a PLL-circuit 1 receives the multiplex signal
 5 $m(t)$ locks to the pilot carrier and generates the 2nd harmonic of the pilot carrier, i.e. a signal $2\sin(2\omega_{pil}t)$. For the coherent amplitude demodulation of the stereo-difference signal a low phase error between pilot carrier and the 2nd harmonic of the pilot carrier is required. This coherent amplitude demodulation is performed by way of a first mixer 2 which receives the multiplex signal
 10 $m(t)$ at its first input and the 2nd harmonic of the pilot carrier at its second input. The output signal of the demodulator 2 is input to a filter 3 which outputs the stereo-difference signal $m_d(t)$. The stereo-sum signal $m_s(t)$ is generated by a lowpass filtering of the multiplex signal $m(t)$ with a lowpass filter 4.

15 The left and right audio signals $l(t)$ and $r(t)$ are calculated by addition and subtraction of the stereo-sum signal and the stereo-difference signal:

$$r(t) = m_s(t) - m_d(t) = (a_l(t) + a_r(t)) - (a_l(t) - a_r(t)) = 2a_r(t)$$

20
$$l(t) = m_s(t) + m_d(t) = (a_l(t) + a_r(t)) + (a_l(t) - a_r(t)) = 2a_l(t)$$

The left audio signal $l(t)$ is generated by an adder 35 which receives the stereo-difference signal $m_d(t)$ at its first input and the stereo-sum signal $m_s(t)$ at its second input. The right audio signal $r(t)$ is generated by a subtractor 36 which
 25 receives the stereo-sum signal $m_s(t)$ as minuend at its first input and the stereo-difference signal $m_d(t)$ as subtrahend at its second input.

The RDS-signal is coherent amplitude demodulated by multiplying the multiplex signal $m(t)$ with the 3rd harmonic of the pilot carrier, i.e. a 57 kHz carrier
 30 in systems which use the frequency 19 kHz as carrier frequency. Therefore, the 3rd harmonic of the pilot carrier is extracted from the multiplex signal $m(t)$ by filtering said signal with a bandpass filter 33 which has a center frequency of 57 kHz. The output signal of the bandpass filter 33 is input to a COSTAS-loop circuit 34 which locks to the amplitude modulated RDS signal to recover the
 35 RDS-carrier, i.e. the 3rd harmonic of the pilot carrier. The recovered RDS-carrier is multiplied with the output signal of the bandpass filter 33 by a second mixer 9 to demodulate the RDS-signal. With this multiplication and a following

1 lowpass filtering by a lowpass filter 10 the coherent amplitude demodulation of
the RDS-signal is performed. The output signal of the lowpass filter 10 is fed
to a RDS-decoder 11 which decodes the RDS-signal $m_{\text{rds}}(t)$ and outputs the
RDS-data.

5

For the detection of a stereo transmitter the stereo-demultiplexer needs to de-
tect the pilot carrier. A reliable method for the detection of the pilot carrier is
to perform a coherent amplitude demodulation of the multiplex signal $m(t)$ with
the pilot carrier. Therefore, the PLL-circuit 1 generates a carrier with a carrier
10 frequency ω_{pil} that is in phase to the pilot carrier. This carrier is mixed with
the multiplex signal by a third mixer 12 and the output signal of the third
mixer 12 $m_g(t)$ is lowpass filtered by a lowpass filter 13 to suppress mixing
products with a higher frequency. The so generated DC-signal $m_h(t)$ is a reli-
able information for the detection of stereo transmission.

15

This described stereo-demultiplexer has the particular disadvantage that it
needs a quite high calculation power in a digital solution, especially since a
carrier with the frequency of the 3rd harmonic of the pilot carrier, i.e. 57 kHz,
has to be generated.

20

Therefore, it is the object of the present invention to provide a method for ste-
reo-demultiplexing and RDS-demodulation needing less calculation power and
a stereo-demultiplexer including a RDS-demodulator working according to said
method, i.e. needing less calculation power.

25

The inventive method is defined in independent claim 1 and the stereo-demul-
tiplexer according to the present invention is defined in independent claim 13.
Preferred embodiments of the inventive method are defined in dependent
claims 2 to 12.

30

The present invention and its embodiments will be better understood from the
following detailed description of exemplary embodiments thereof taken in con-
junction with the accompanying drawings, wherein

35 **Fig. 1** shows a stereo-demultiplexer according to a first preferred em-
bodiment of the present invention;

1 **Fig. 2** shows the spectrum of the input signal and the output signal of the first mixer 2 shown in Fig. 1;

Fig. 3 shows the spectrum of the input signal and the output signal of the second mixer 5 shown in Fig. 1;

Fig. 4 shows the spectrum of the input signals and the output signal of the subtractor 6 shown in Fig. 1;

10 **Fig. 5** shows a possible digital realization of a stereo-demultiplexer according to the prior art;

Fig. 6 shows a stereo-demultiplexer according to a second preferred embodiment of the present invention;

15 **Fig. 7** shows a stereo-demultiplexer according to a fourth preferred embodiment of the present invention; and

Fig. 8 shows a stereo-demultiplexer according to the prior art.

20 According to a first aspect of the present invention the coherent amplitude demodulation of the RDS-signal is performed without the generation of an additional carrier with the frequency of the 3rd harmonic of the pilot carrier, i.e. without an additional 57 kHz carrier. Therefore, the present inventions
25 achieves big advantages in terms of calculation power saving.

In the following the first aspect of the present invention will be explained on the basis of Fig. 1 to 4 which show a first preferred embodiment according to the present invention. For the sake of simplicity the shown multiplex signal
30 $m(t)$ contains only the signals relevant for the present invention, i.e. the amplitude modulated RDS-signal and the pilot carrier. The demultiplexing and demodulation of the left and right audio signals is exactly performed like in the stereo-demultiplexer according to the prior art shown in Fig. 8. Also, the detection of a stereo transmitter is performed in a similar way. Therefore, the description of these parts of the stereo-demultiplexer according to the present invention which is shown in Fig. 1 is omitted.
35

1 During the generation of the stereo-difference signal $m_d(t)$ an intermediate signal $m_a(t)$ is generated as output signal of the first mixer 2 which is input into the lowpass filter 3, i.e. the intermediate signal equals to the multiplex signal $m(t)$ multiplied with the 2nd harmonic of the pilot carrier (multiplied with the
5 38 kHz carrier). Therefore, in the intermediate signal the RDS-carrier is mixed from the 3rd harmonic of the pilot carrier to the frequency of the pilot carrier, i.e. from 57 kHz to 19 kHz. The pilot carrier itself is mixed from 19 kHz to -19 kHz, i.e. it is mirrored. Fig. 2 shows the spectrum $M(jf)$ of the multiplex signal $m(t)$ on its left hand side and the spectrum of the output of the first mixer 2,
10 i.e. the spectrum $M_a(jf)$ of the intermediate signal $m_a(t)$ on its right hand side. As mentioned above, only the signals relevant for the present invention are shown. It can be seen that the spectrum $M_a(jf)$ of the intermediate signal $m_a(t)$ at 19 kHz consists of a mirrored pilot carrier and the frequency shifted amplitude modulated RDS-signal.

15 To properly extract the amplitude modulated RDS-signal from the intermediate signal $m_a(t)$, according to the first preferred embodiment of the present invention, the mirrored pilot carrier needs to be subtracted from the intermediate signal $m_a(t)$. To mirror the pilot carrier the stereo-sum signal $m_s(t)$ is multiplied with the 2nd harmonic of the pilot carrier, i.e. with the 38 kHz carrier by
20 a fourth mixer 5.

Fig. 3 shows the spectrum $M_s(jf)$ of the stereo-sum signal $m_s(t)$ at the left hand side and the spectrum $M_b(jf)$ of the mirrored pilot carrier at its right hand side.

25 Fig. 4 shows the subtraction of the mirrored pilot carrier $m_b(t)$ from the intermediate signal $m_a(t)$ which is performed by way of a subtractor 6. The left hand side of Fig. 4 shows the spectrum $M_a(jf)$ of the intermediate signal $m_a(t)$ from which the spectrum $M_b(jf)$ of the mirrored pilot carrier $m_b(t)$, which is
30 shown in the middle of Fig. 4, is subtracted to gain the spectrum $M_c(jf)$ of the amplitude modulated RDS-signal which is shown at the right hand side of Fig. 4.

Fig. 1 shows that the so generated amplitude modulated RDS-signal that has
35 now a carrier frequency of 19 kHz (a carrier frequency according to the pilot carrier) is processed like in the prior art RDS-demodulator shown in Fig. 8. The only difference is that the center frequency of the bandpass filter 33

1 shown in Fig. 8 is changed to the frequency of the pilot carrier, i.e. 19 kHz in
the bandpass filter 7 shown in Fig. 1 which receives the output signal of the
subjector 6 and that the carrier frequency of the COSTAS-loop circuit 34
shown in Fig. 8 is changed from the 3rd harmonic of the carrier frequency to
5 the carrier frequency, i.e. from 57 kHz to 19 kHz, in the COSTAS-loop circuit 8
shown in Fig. 1 which receives the output signal of the bandpass filter 7 and
feeds its carrier having the frequency of the pilot carrier to the second mixer 9
that demodulates said output signal of the bandpass filter 7 by multiplying
with the output signal of the COSTAS-loop circuit 8.

10

Fig. 5 shows a possible digital solution of the prior art stereo-demultiplexer and
RDS decoder shown in Fig. 8 which elucidates a sampling rate decimation.
Such a sampling rate decimation can be performed, because the frequency
modulated multiplex signal $m(t)$ has a much higher bandwidth than the fre-
15 quency demodulated and stereo-demultiplexed audio signal and the RDS sig-
nal. The combination of the present invention with the digital stereo-demulti-
plexer shown in Fig. 5 has the advantage of a very low calculation power. For a
better understanding, first this digital stereo-demultiplexer is described with-
out the application of the present invention.

20

As it is shown in Fig. 5, the stereo-sum signal $m_s(t)$ is generated from the mul-
tiplex signal $m(t)$ by a sampling rate decimation with a decimation factor D by
a first sampling rate decimation filter 14 and a following lowpass filtering with
a lowpass filter 15. The so generated stereo-sum signal $m_s(t)$ is thereafter de-
25 layed by a first delay element with a delay of τ to equalize the group delay of a
second sampling rate decimation filter 21 in the difference path.

Furtheron, a digital PLL circuit 37 (which replaces the PLL circuit 1 of the first
preferred embodiment according to the present invention) is working with the
30 decimated sampling rate. Therefore, the decimation filtering of the sum path,
i.e. the path to generate the stereo-sum signal $m_s(t)$ is used for the sampling
rate decimation of the stereo-sum signal $m_s(t)$ and the pilot carrier, i.e. the
output signal of the first sampling rate decimation filter 14 is not only input to
the lowpass filter 15 but also to the DPLL-circuit 37. This realization is de-
35 scribed in more detail in a parallel european patent application "digital stereo
demultiplexer" of the same applicant.

09694337 "101300

- 1 The DPLL-circuit 37 generates a carrier for the coherent amplitude demodulation of the stereo-difference signal $m_d(t)$ and a carrier for the coherent pilot carrier detection, i.e. the detection of a stereo transmitter. Within the DPLL-circuit 37 another carrier is required for synchronization purposes that is in
- 5 quadrature to the pilot carrier. Therefore, the DPLL-circuit 37 generates three carriers, i.e. the 38 kHz carrier for the coherent amplitude demodulation of the stereo-difference signal $m_d(t)$ and a complex 19 kHz carrier. The complex 19 kHz carrier consists of the carrier for the coherent pilot carrier detection and the in quadrature component of this 19 kHz carrier which is required within
- 10 the DPLL-circuit 37 for synchronization purposes.

Similar to the detection of a stereo transmitter described in connection with Fig. 8 the stereo transmitter is detected by a multiplication of the multiplex signal $m(t)$ with the pilot carrier and a following lowpass filtering. This de-

15 modulation is performed by a third mixer 31 which receives the sampling rate decimated multiplex signal from the first sampling rate decimation filter 14 and the pilot carrier generated by the DPLL-circuit 37 on basis of said sampling rate decimated multiplex signal. The output signal of the third mixer 31 is input to a lowpass filter 32 which outputs the pilot detection signal $m_h(t)$.

- 20 The coherent amplitude demodulation of the stereo-difference signal $m_d(t)$ needs to be performed at a sampling rate which is higher than the sampling rate of the audio signal, since the bandwidth of the multiplex signal $m(t)$ is higher than the bandwidth of the audio signal. Therefore, the carrier for the co-
- 25 herent amplitude demodulation of the stereo-difference signal $m_d(t)$ needs to be generated with a higher sampling rate. Fig. 5 shows that the carrier is generated with a sampling rate that is D times higher than the sampling rate of the audio signal, since the second harmonic of the pilot carrier generated by the DPLL-circuit 37 is upsampled with a factor of D in a sampling rate upsampling
- 30 circuit 18. To perform the coherent amplitude demodulation which is necessary to generate the stereo-difference signal $m_d(t)$ the so generated carrier with a carrier frequency of $2\omega_{pil}$ that is locked in phase to the pilot carrier is multiplied with the multiplex signal $m(t)$ by a first mixer 20. Furtheron, the output signal of the first mixer 20 is lowpass filtered by a lowpass filter 24 which out-
- 35 puts the stereo-difference signal $m_d(t)$. A second sampling rate decimation filter 21 decimates the sampling rate of the output signal of the first mixer 20 by a decimation factor of D by before it is input to the lowpass filter 24. Fur-

009101 201800 0691337

theron, the multiplex signal $m(t)$ needs to be delayed by a delay of τ to equalize the group delay of the first sampling rate decimation filter 14 in the sum path before it is input to the first mixer 20. This delay is achieved by a second delay element 19 arranged before the first mixer 20.

Within the digital stereo-demultiplexer shown in Fig. 5 the RDS data is generated by mixing the multiplex signal $m(t)$ with a complex third harmonic of the pilot carrier to the baseband with a fifth mixer 26 before the complex RDS baseband signal is sampling rate decimated by a factor F with a third sampling rate decimation filter 38, a subsequent filtering with a reconstruction lowpass filter 28 which is a matched filter for the optimal RDS decoding and a generation of the amplitude demodulated RDS-signal with the help of a COSTAS-loop circuit 29 which locks to the RDS carrier, whereafter the so generated coherent amplitude demodulated RDS-signal is fed to an RDS-decoder 30 which outputs the RDS data.

Fig. 6 shows a second preferred embodiment according to the present invention. This second preferred embodiment makes use of the sampling rate decimation filter of the stereo-difference signal for the sampling rate decimation of the RDS signal.

Therefore, the stereo-demultiplexer according to the second preferred embodiment of the present invention shown in Fig. 6 equals to the digital stereo-demultiplexer shown in Fig. 5 in the generation of the stereo transmitter detection, the stereo-sum signal $m_s(t)$ and the stereo-difference signal $m_d(t)$.

According to the second preferred embodiment of the present invention the RDS-signal is retrieved similar to the first preferred embodiment according to the present invention shown in Fig. 1, but on basis of sampling rate decimated signals. Therefore, the sampling rate decimated intermediate signal $m_a(t)$ which is output by the second sampling rate decimation filter 21 is input as minuend to a subtractor 25 which subtracts the mirrored pilot carrier $m_b(t)$ which is also sampling rate decimated and outputs an amplitude modulated RDS-signal $m_c(t)$. The mirrored pilot carrier $m_b(t)$ is generated by a mixing of the sampling rate decimated multiplex signal $m(t)$ which is output from the first sampling rate decimation filter 14. The bandwidth of the sampling rate decimation filter is determined so that the stereo-sum signal and the pilot carrier are in the

1 passband of the filter. This operation is performed with a fourth mixer 22
which receives the output signal of the first sampling rate decimation filter 14
and the sampling rate decimated second harmonic of the pilot carrier which is
5 generated by a DPLL-circuit 17 which also receives the output signal of the
first sampling rate decimation filter 14. This sampling rate decimated second
harmonic of the pilot carrier is also fed to the upsampling circuit 18 before it
is used for the coherent amplitude demodulation of the stereo difference signal
 $m_d(t)$. The output signal of the second modulator 22, i.e. the mirrored pilot
10 carrier, is delayed by a delay of τ in a third delay element 23 to equalize the
group delay of the second sampling rate decimation filter 21 in the difference
path before it is output as mirrored pilot carrier $m_b(t)$ and therewith as subtra-
huent to the subtractor 25. The amplitude modulated RDS-signal $m_c(t)$ is input
to a fourth mixer 26 which downconverts the amplitude modulated RDS signal
15 to a complex baseband signal by mixing with the complex 19 kHz carrier. As
mentioned above in connection with Fig. 1, this complex carrier with the fre-
quency of the pilot tone is already available in the DPLL-circuit 17, since the
in phase component thereof is needed for the stereo transmitter detection and
the in quadrature component thereof is needed for synchronization purposes
within the DPLL-circuit 17.

20 Apart from a further sampling rate decimation by a decimation factor of E in-
stead of a decimation factor F the following processing of the RDS-signal is
similar to that of the second preferred embodiment of the present invention
shown in Fig. 5. The decimation factors D, E and F have the following relation:

25

$$D + E = F$$

This digital solution of the second preferred embodiment according to the
present invention has the advantage that the amplitude modulated RDS-signal
30 is mixed to the complex baseband in combination with a sampling rate decima-
tion. Therefore, the respective processing within the COSTAS-loop, the selec-
tivity filtering and the matched filtering for the optimal decoding of the ampli-
tude modulated RDS-signal are performed at low sampling rates, as described
in connection with Fig. 5. As shown in Fig. 6, this can advantageously be
35 achieved by using the sampling rate decimation filters of the stereo-sum signal
and the stereo-difference signal for the RDS-demodulation. Additionally, all
carriers for the frequency shift of the amplitude modulated RDS-signal are

1 available from the stereo-demultiplexer. Therefore, no additional sin/cos calculations or tables are required at high sampling rates for the coherent demodulation of the amplitude modulated RDS-signal. Therefore, this embodiment has big advantages in terms of calculation power saving.

5

As mentioned above, the DPLL has only to generate three carriers, namely the 38 kHz carrier (second harmonic of the pilot carrier) for the coherent amplitude demodulation of the stereo-difference signal and a complex 19 kHz carrier (complex frequency of the pilot carrier). The 19 kHz carrier consists of the carrier for the coherent pilot carrier detection and the in quadrature component of this 19 kHz carrier that is required within the DPLL for synchronization purposes.

According to the second preferred embodiment of the present invention the noise in the band of the pilot carrier is subtracted from the output signal of the second sampling rate decimation filter 21. Therefore, as also shown in connection with the first preferred embodiment of the present invention, the pilot carrier that is included in the stereo-sum signal $m_s(t)$ is mixed with the 38 kHz carrier (second harmonic of the pilot carrier) and delayed to equalize the group delay τ of the sampling rate decimation filters. The so generated signal is subtracted from the output of the sampling rate decimation filter 21 in the stereo-difference path to delete the noise in the band of the pilot carrier.

This generated amplitude modulated RDS-signal with a carrier amplitude of 19 kHz is mixed to the complex baseband by mixing with the complex 19 kHz carrier that is already present within the stereo-demultiplexer. A complex RDS baseband signal $m_{cL}(t)$ is sampling rate decimated by a factor of E before it is fed to the reconstruction lowpass filter 28. This reconstruction lowpass filter 28 is the matched filter for the optimal RDS decoding. The COSTAS-loop circuit 29 locks to the RDS-carrier and generates the amplitude demodulated RDS-signal. The so coherent amplitude demodulated RDS-signal is fed to the RDS-decoder 30 which outputs the RDS data.

Fig. 7 shows the third preferred embodiment according to the present invention. This third preferred embodiment considers that the output signal of the second sampling rate decimation filter 21 can already be used for the RDS-decoding with only a slight performance degradation. The performance degrada-

1 tion results from the additional noise in the band of the pilot carrier that is
added to the RDS-signal. Therefore, the third mixer 26 directly receives the
output signal of the second sampling rate decimation filter 21, whereafter the
RDS-signal undergoes the same processing as shown and described in connec-
5 tion with Fig. 6. Accordingly, the third preferred embodiment of the present in-
vention shown in Fig. 7 does not comprise the fourth mixer 22, the third delay
element 23 and the subtractor 25.

It is obvious that such changes and modifications can also be applied to the
10 first preferred embodiment according to the present invention shown in Fig. 1,
i.e. that the bandpass filter 7 directly receives the intermediate signal $m_a(t)$
and the stereo-demultiplexer shown in Fig. 1 would not comprise the third
mixer 5 and the subtractor 6.

15

20

25

30

35

Claims

1. Method to retrieve RDS information by filtering and transforming an incoming multiplex signal ($m(t)$) into an amplitude demodulated RDS signal ($m_{\text{rds}}(t)$), **characterized in that** an amplitude modulated RDS signal ($m_c(t)$) is derived on basis of an intermediate signal ($m_a(t)$) obtained during an extraction of a stereo-difference signal ($m_d(t)$) from the incoming multiplex signal ($m(t)$).
2. Method according to claim 1, **characterized in that** the intermediate signal ($m_a(t)$) is obtained by multiplying the multiplex signal ($m(t)$) with the second harmonic of a pilot carrier ($2\sin(2\omega_{\text{pil}}t)$).
3. Method according to claim 1 or 2, **characterized in that** the amplitude modulated RDS signal ($m_c(t)$) is derived by subtracting a stereo-sum signal ($m_s(t)$) multiplied by the second harmonic of a pilot carrier ($2\sin(2\omega_{\text{pil}}t)$) from the intermediate signal ($m_a(t)$).
4. Method according to claim 1 or 2, **characterized in that** the amplitude modulated RDS signal ($m_c(t)$) is set to be the intermediate signal ($m_a(t)$).
5. Method according to anyone of claims 1 to 4, **characterized by**:
- amplitude demodulation of the amplitude modulated RDS signal ($m_c(t)$);
 - and
 - decoding the amplitude demodulated RDS signal ($m_{\text{rds}}(t)$).
6. Method according to claim 5, **characterized in that** the amplitude demodulation of the amplitude modulated RDS signal ($m_c(t)$) is performed by a coherent amplitude demodulation with a carrier which is recovered by a COSTAS-loop from the amplitude modulated RDS signal.
7. Method according to claim 5, **characterized in that** the amplitude demodulation of the amplitude modulated RDS signal ($m_c(t)$) into a RDS base-band signal ($m_{\text{CL}}(t)$) is performed by a complex demodulation.
8. Method according to claim 7, **characterized in that** the complex carrier needed for the complex demodulation is output from a digital PLL-circuit (17)

1 for pilot carrier recovery.

9. Method according to claim 7 or 8, **characterized in that** the carrier of the RDS signal ($m_{\text{rds}}(t)$) is recovered with a COSTAS-loop locking to the RDS baseband signal ($m_{\text{cL}}(t)$).

5

10. Method according to anyone of claims 1 to 9, **characterized in that** the intermediate signal ($m_{\text{a}}(t)$) is obtained on basis of a sampling rate decimated stereo-difference signal ($m_{\text{d}}(t)$).

10 11. Method according to anyone of claims 1 to 10, **characterized by** a sampling rate decimation to obtain carriers for the respective demodulations.

12. Method according to anyone of claims 1 to 11, **characterized by** a sampling rate decimation of the RDS baseband signal ($m_{\text{cL}}(t)$).

15

13. RDS demodulator, **characterized in that** it is adapted to operate according to the method defined in anyone of claims 1 to 12.

20

25

30

35

003707 "XET6960

Method and device to retrieve RDS information

(Fig. 1)

Figure 1 consists of 12 scatter plots, labeled (a) through (l), each showing the relationship between a specific variable and the number of children. The variables are: (a) Age, (b) Education, (c) Income, (d) Employment, (e) Health, (f) Religion, (g) Ethnicity, (h) Marital status, (i) Family size, (j) Urban/rural, (k) Migration, and (l) Fertility rate. Each plot shows a positive correlation between the variable and the number of children.

Figure 1



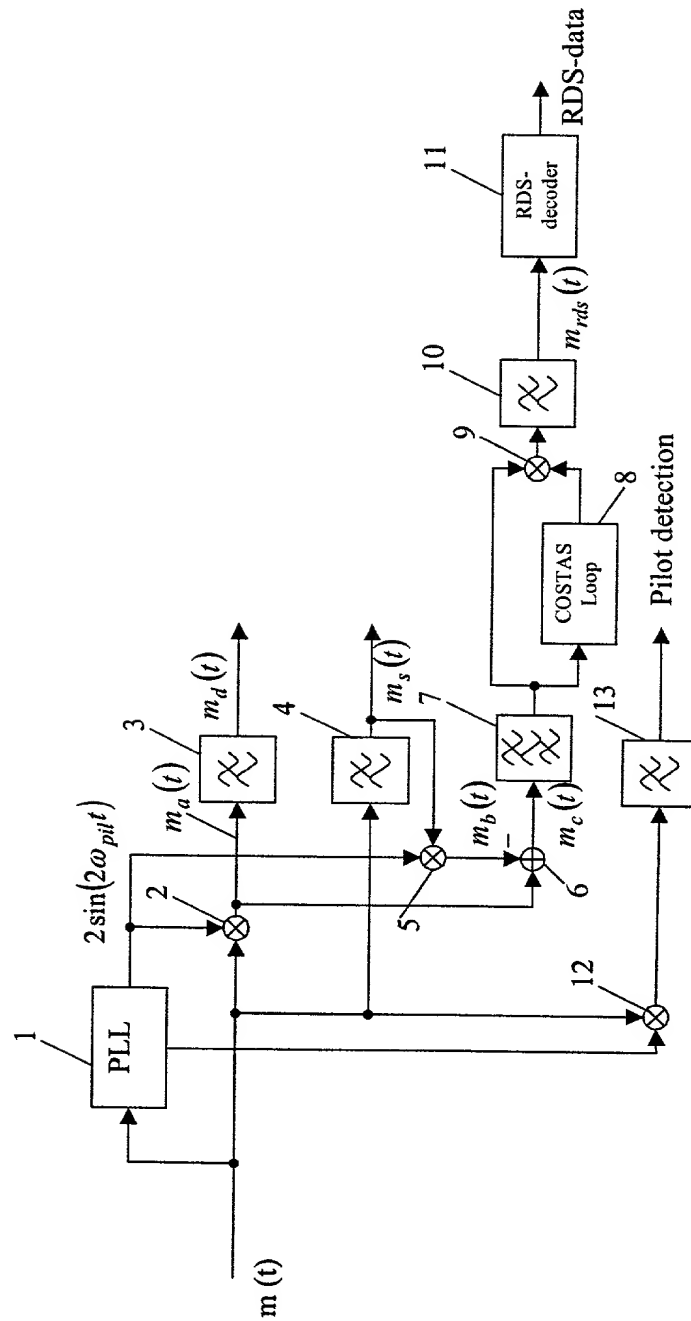


Figure 2

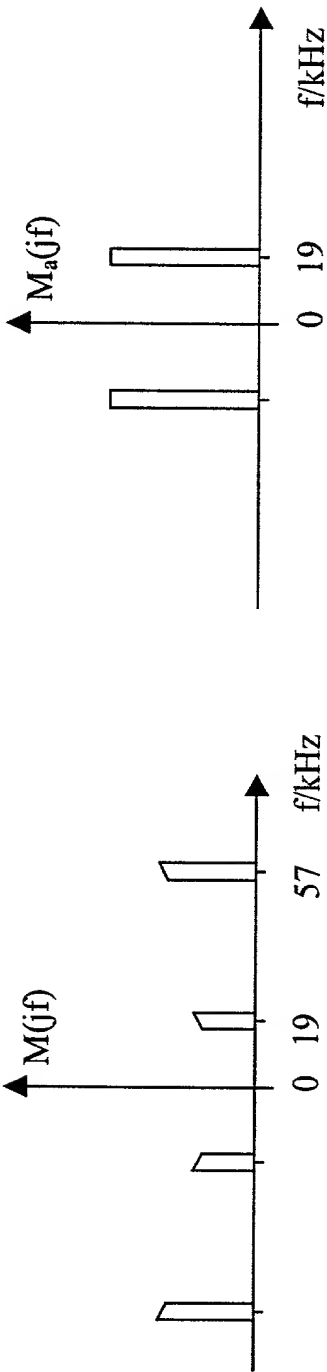


003 F07 " 2 E E F 6 3 6 0

Figure 3

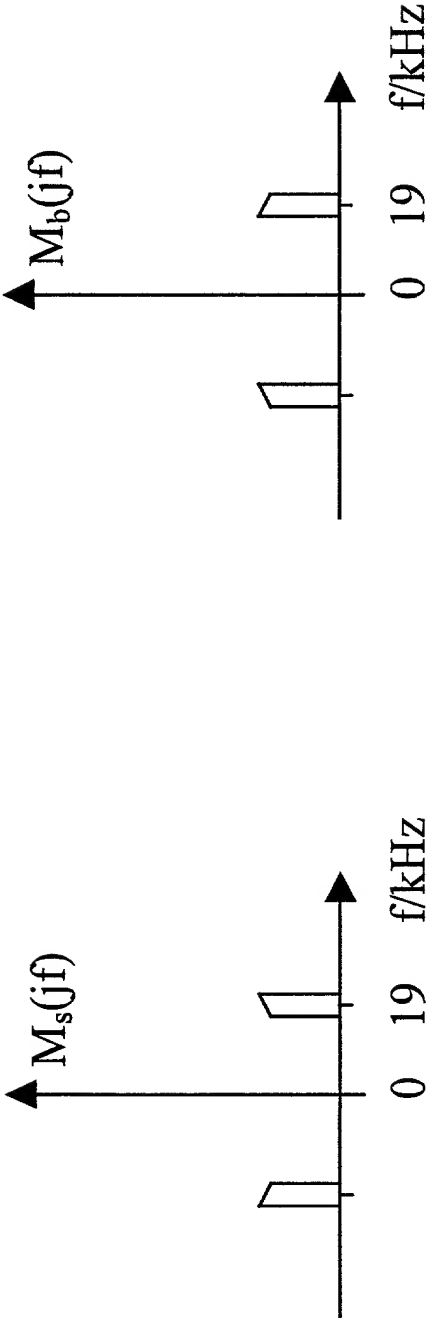

003T01 "LET6960

Figure 4

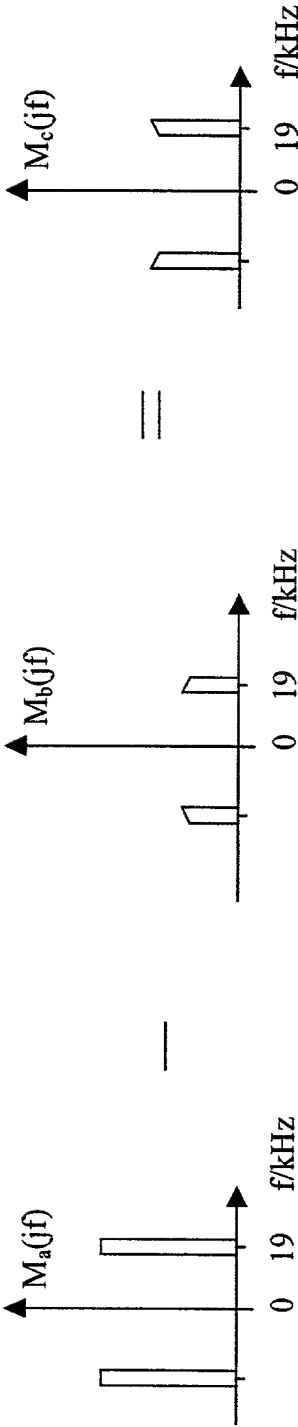

CONFIDENTIAL

Figure 5

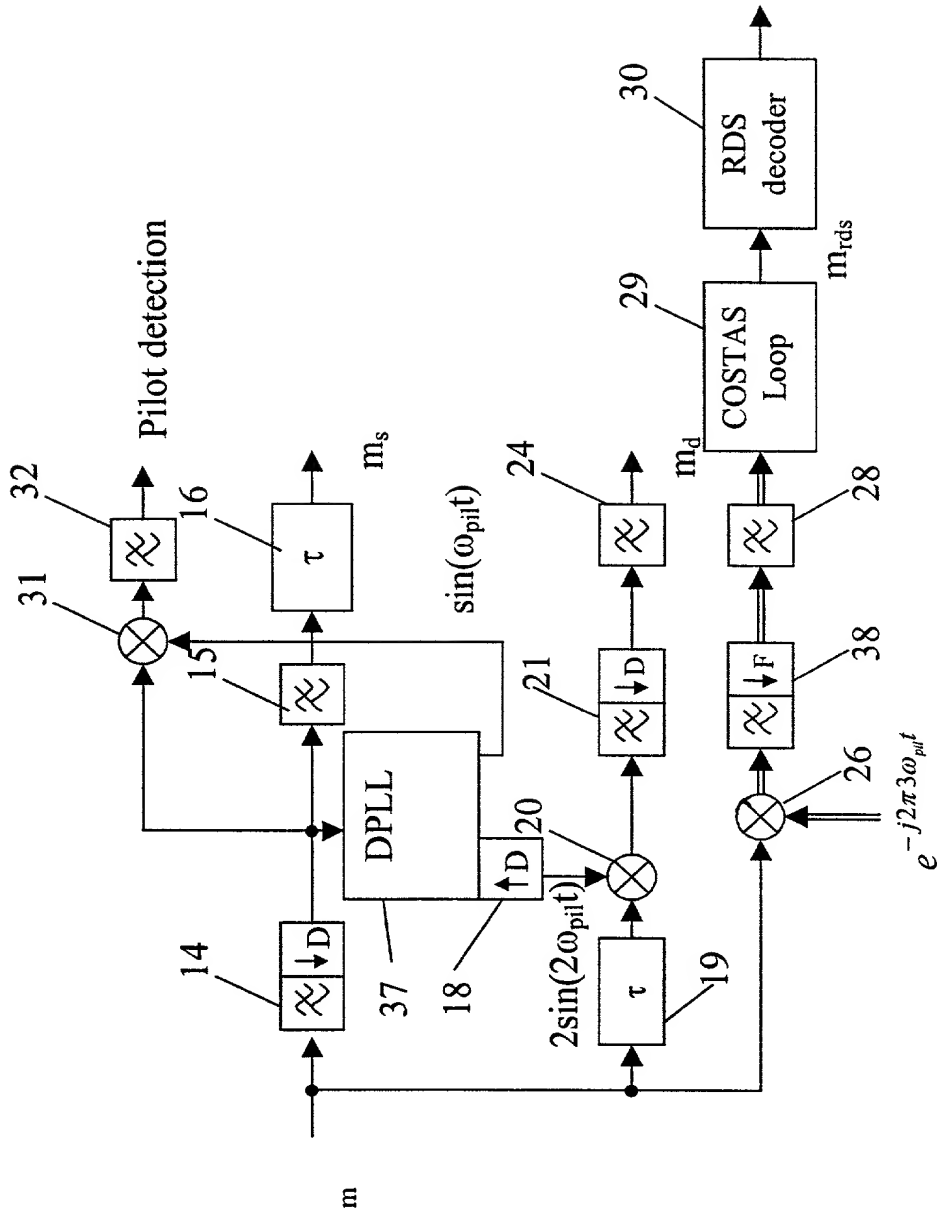


Figure 6

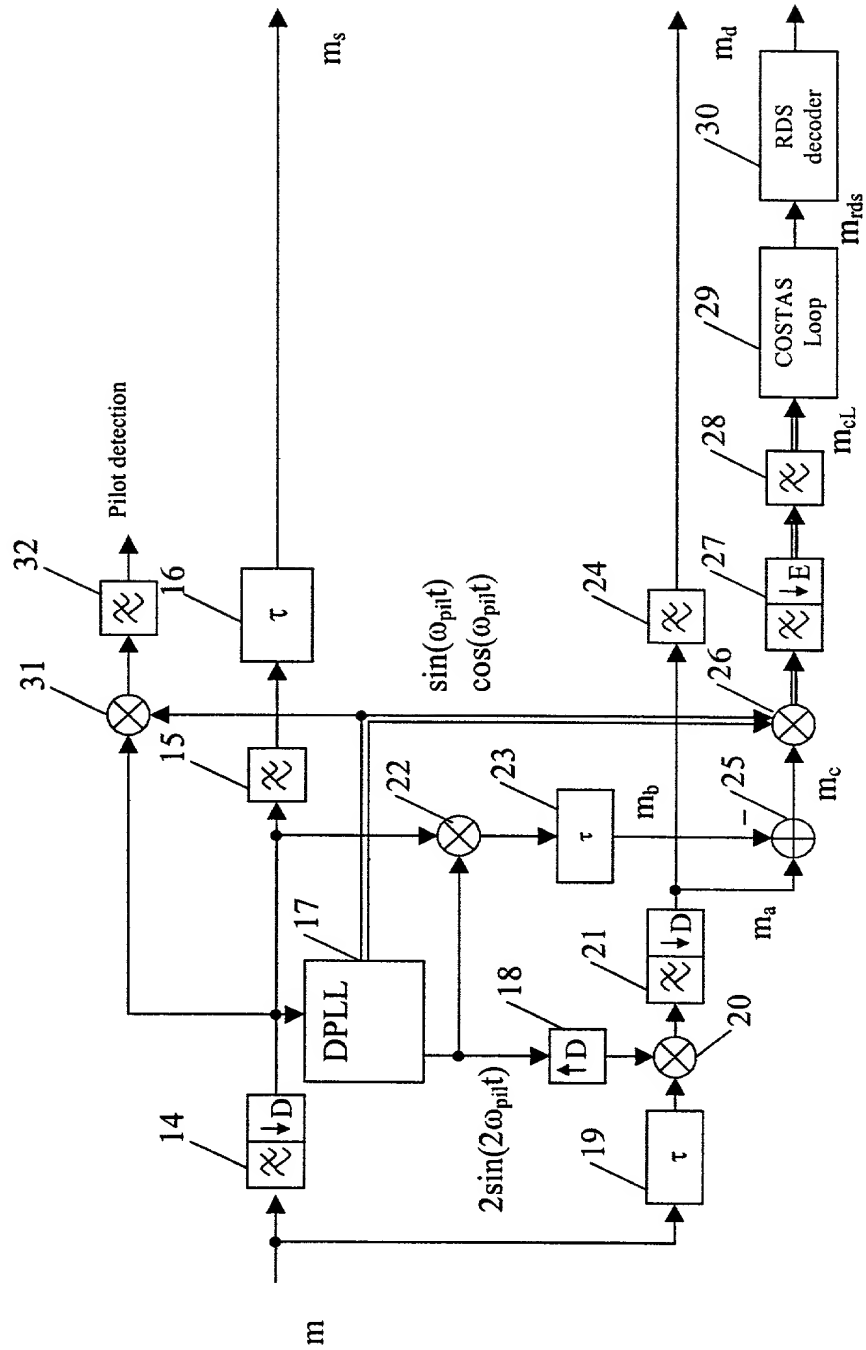


Figure 7


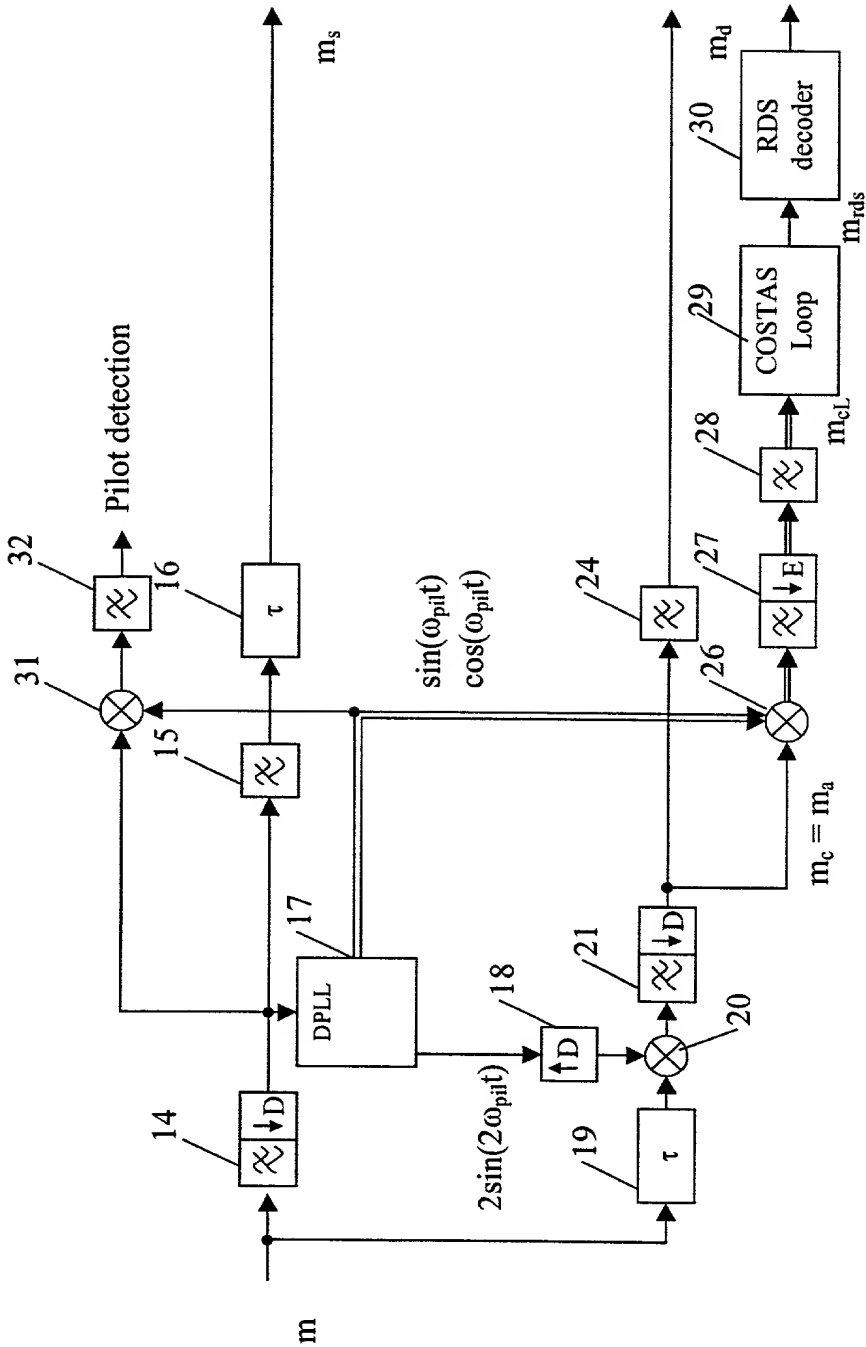


Figure 8

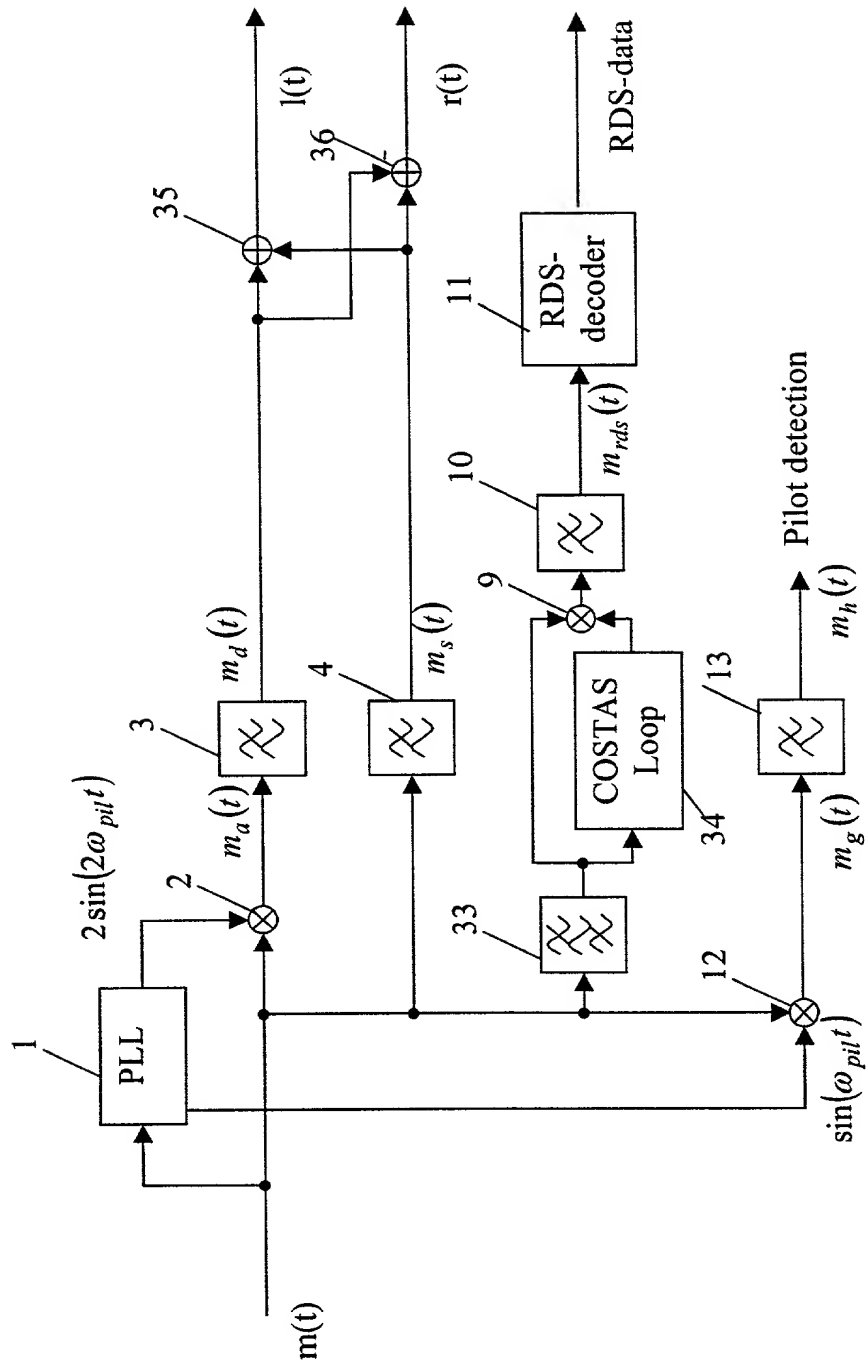

DECLARATION FOR PATENT APPLICATION (JOINT OR SOLE)**(Under 37 CFR § 1.63; with Power of Attorney)****FROMMER LAWRENCE & HAUG LLP**

FLH File No. 450117-02753

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention ENTITLED:

METHOD AND DEVICE TO RETRIEVE RDS INFORMATION

the specification of which

X is attached hereto.

was filed on _____ as Application Serial No. _____,

with amendment(s) through _____ (if applicable, give dates).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s) [list additional applications on separate page]: Priority Claimed:Number:
99 120 799.4Country:
EuropeFiled (Day/Month/Year):
20 October 1999Yes No
X

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Application(s) [list additional applications on separate page]:Appl'n. Ser. Number: Filed (Day/Month/Year): Status (patented, pending, abandoned):I hereby appoint WILLIAM S. FROMMER, Registration No. 25,506, and DENNIS M. SMID, Registration No. 36,930 or their duly appointed associate, my attorneys, with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to file continuation and divisional applications thereof, to receive the Patent, and to transact all business in the Patent and Trademark Office and in the Courts in connection therewith, and specify that all communications about the application are to be directed to the following correspondence address:WILLIAM S. FROMMER, Esq.,
c/o FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151Direct all telephone calls to:
(212) 588-0800
to the attention of:
WILLIAM S. FROMMER

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

INVENTOR(S):**Signature:****Full name of sole or first inventor:****Residence:****Citizenship:**Jens Wildhagen
Jens WILDHAGEN
Weinstadt, Germany
Germany**Date:** 25.9.00**Signature:****Full name of 2nd joint inventor (if any):****Residence:****Citizenship:****Date:****Signature:****Full name of 3rd joint inventor (if any):****Residence:****Citizenship:****Date:**

[Similarly list additional inventors on separate page]

Post Office Address(es) of inventor(s):

[if all inventors have the same post office address]

SONY International (Europe) GmbH
Kemperplatz 1
D-10785 Berlin
GERMANY

Note: In order to qualify for reduced fees available to Small Entities, each inventor and any other individual or entity having rights to the invention must also sign an appropriate separate "Verified Statement (Declaration) Claiming [or Supporting a Claim by Another for] Small Entity Status" form [e.g. for Independent Inventor, Small Business Concern, Nonprofit Organization, individual Non-Inventor].

Note: A post office address must be provided for each inventor.